


Premium Board

It has high-quality rigidity and flexibility with an excellent smoothness. Its flawless surface makes it an ideal choice for lamination processes. It is the preferred material for applications such as rigid boxes, lid lamination, and more.

Grammage	Thickness	MD Stiffness	CD Stiffness
ISO 536	ISO 534	ISO 5628	ISO 5628
gr/m ²	mm	mNm	mNm
630	0.8	118	63
795	1.0	147	76
935	1.2	194	95
1220	1.5	280	161
1380	1.8	322	195
1520	2.0	393	271
1660	2.2	460	312
1895	2.5	678	473
2130	2.8	731	485
2270	3.0	785	610

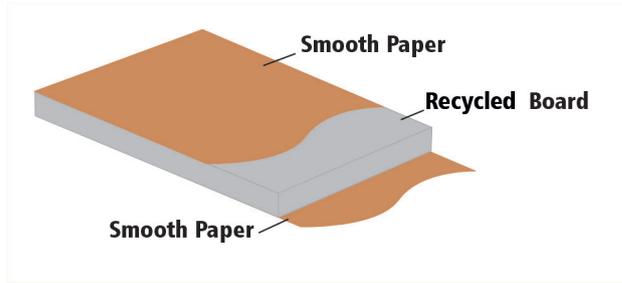

Test	Tolerance	Test metod
Density	± 1,43	Türkoğlu
Humidity	9.0% abs. %±5	ISO 287
Thickness	%±5	ISO 534
Size	±0.5mm	Türkoğlu
Grammage	%±5	ISO 536
Recyclability	1.00 ~ 3.00mm. % 97	FSC

Applications

> Rigid box lamination, luxury packaging, textiles packaging, stationery, shoe boxes, cosmetic packs, and it offers unlimited usage possibilities in packaging industry.

Servises

- > Embossing
- > Die Cutting
- > Guillotine Cutting
- > Strapping & Packaging
- > Labeling & Barcoding

Size

- > The minimum 350 x 400mm
- > The maximum 1500 x 1800 mm

Applicable Printing

- > Pattern printing
- > Flexsograph
- > Digital Printing

Description

- > considering the variety of the raw materials, the values provided in the tables may vary by ±5%.
- > The stiffness Geometric Mean has been calculated using the formula $\sqrt{(B \text{ Stiffness} * E \text{ Stiffness})}$.
- > For detailed inquiries and technical information, please contact our team.

Certificates



ISO 9001:2015



ISO 14001:2015



ISO 22000:2005

